

STEALTH 9000™

INDOOR/OUTDOOR HC LENS

TECHNICAL
SPECIFICATION

PRODUCT CODE: ASA770-16R-100

EYE & FACE PROTECTION

LIGHTWEIGHT SAFETY SPECTACLE WITH A WRAPAROUND 9 BASE CURVE POLYCARBONATE LENS

INSTRUCTIONS FOR USE

In use ensure that the safety spectacles fit comfortably and securely on the head

Ensure that the safety spectacles are in place, before entering the hazard area

STEALTH 9000



STEALTH 9000™ FEATURES & PERFORMANCE

Wraparound 9 base curve polycarbonate lens

The slim stylish temples have been co-injection moulded with soft rubber to increase grip and provide excellent comfort levels

All lenses are Optical Class 1 and block 99.9% of ultraviolet radiation

Lens and frame offer protection against low energy high-speed particles at 45m/s (101mph)

The optical qualities of the lens comply with the requirements of optical class 1 (highest)

UVA, UVB and UVC protection

Tested to resist the impact of a 6mm steel ball fired at 100mph (160kph) at the lens

Comfortable: Sports style flexible temples are co-injection moulded with soft rubber for extra comfort

Adjustable Nose Piece: The soft nose bridge is adjustable and provides high grip fitting that prevents slippage

Strong Performance: Superior hard-coated class 1 optics available in a range of shades to suit many applications



CLEANING & MAINTENANCE

The safety spectacles may be cleaned with soap and warm water and dried with a soft cloth

Do not clean with chemical or abrasive cleaners

The eye shield should be stored out of direct sunlight, away from chemicals and not exposed to extremes of temperature

CONFORMITY

Conforms to EN 166.1.F & EN 172

EC Certificate Number 0726, issued by Inspec Certification Limited



MANUFACTURING FOR SAFETY
WWW.JSP.CO.UK

UKSALES@JSP.CO.UK
TEL: +44 (0)1993 826050



Issued 11/07/18, V7

STEALTH 9000™

INDOOR/OUTDOOR HC LENS

**TECHNICAL
SPECIFICATION**

PRODUCT CODE: ASA770-16R-100


EYE & FACE PROTECTION

LIGHTWEIGHT SAFETY SPECTACLE WITH A WRAPAROUND 9 BASE CURVE POLYCARBONATE LENS

DIMENSIONS OF INNER PACKAGING

Quantity: 10

Weight: 502g (Approx.)

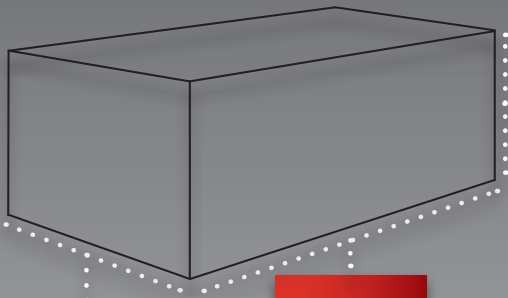

HEIGHT:
165mm


WIDTH:
117mm

LENGTH:
252mm

DIMENSIONS OF OUTER PACKAGING

Quantity: 120

Weight: 6.9kg (Approx.)

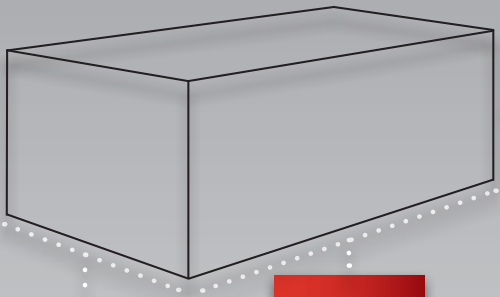






HEIGHT:
370mm

WIDTH:
350mm

LENGTH:
540mm

MARKINGS

Frame: EN166 1.F

Clear Lens:	2C-1.2		1.F.T.K.N
Amber Lens:	2-1.2		1.F.T.K.N
Indoor/Outdoor Lens:	5-1.7		1.F.T
Smoke Lens:	5-2.5		1.F.T.K.N
Blue Mirror Lens:	5-2.5		1.F.T

DIMENSIONS OF SPECTACLE

Lens Thickness: 2.3mm

Lens Base: 9.5mm curve

Lens Size (Vertical): 42mm

Lens Size (Diagonal): 82mm

Bridge: 14mm

Temple Length (Lens to tip): 158mm

Overall Width: 138mm

Closest point between temple tips: 94mm

Weight: 25g (Approx.)



HARDIA™ LENS COATING

An entry level Hard Coating that provides good Scratch-Resistance at an economical price

LIMITATIONS OF USE

Protection will only be offered if the safety spectacles are fitted correctly

If the safety spectacles become scratched or damaged they should be replaced, likewise if the safety spectacles are subjected to severe impact they should be replaced immediately

Do not apply paint, solvents, adhesives or self-adhesive labels, except in accordance with instructions from the manufacturer

The safety spectacles, when in contact with the skin may cause allergic reactions to susceptible individuals. If this occurs leave the hazard area, remove the eye shield and seek medical advice

The attention of users is also drawn to the dangers of modifying or removing any of the original component parts, other than as recommended by the manufacturer

The Stealth 9000™ is not suitable for protection against dusts, liquids or molten metals



MANUFACTURING FOR SAFETY
WWW.JSP.CO.UK

UKSALES@JSP.CO.UK
TEL: +44 (0)1993 826050



Issued 11/07/18, V7