


STAINLESS STEEL SHOWER & EYEWASH UNIT

(SS-S150)



Standards:

This eyewash station is designed to comply with ANSI Z358.1 and EN15154-1 & EN15154-2 standards, ensuring reliable performance and safety for emergency eye irrigation in industrial and hazardous work environments.

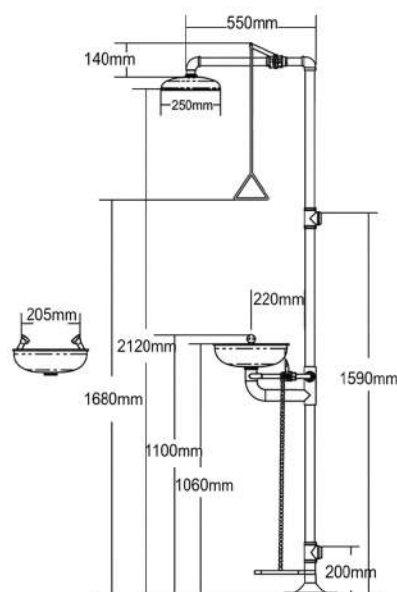

Specifications

Water Type	Material	Valve	Water Inlet	Water Outlet	Operating Pressure	Activation	Flow Rate	Weight	Packaging	Model
Clean or Leached Water	Stainless Steel 304 (Pipe, Shower Head & Bowl)	1" SS304 Ball Valve (Shower) 1/2" SS304 Ball Valve (Eyewash)	1-1/4" IPS/NPT	1-1/4" IPS/NPT	0.2 - 0.8 MPa	Pull Rod (Shower) Flag Handle or Foot Treadle (Eyewash)	Shower: 76 L/min Eyewash: 12 L/min	G.W. 14 kg N.W. 13 kg	74 x 35 x 27 cm (1 set/carton)	SS-S150