


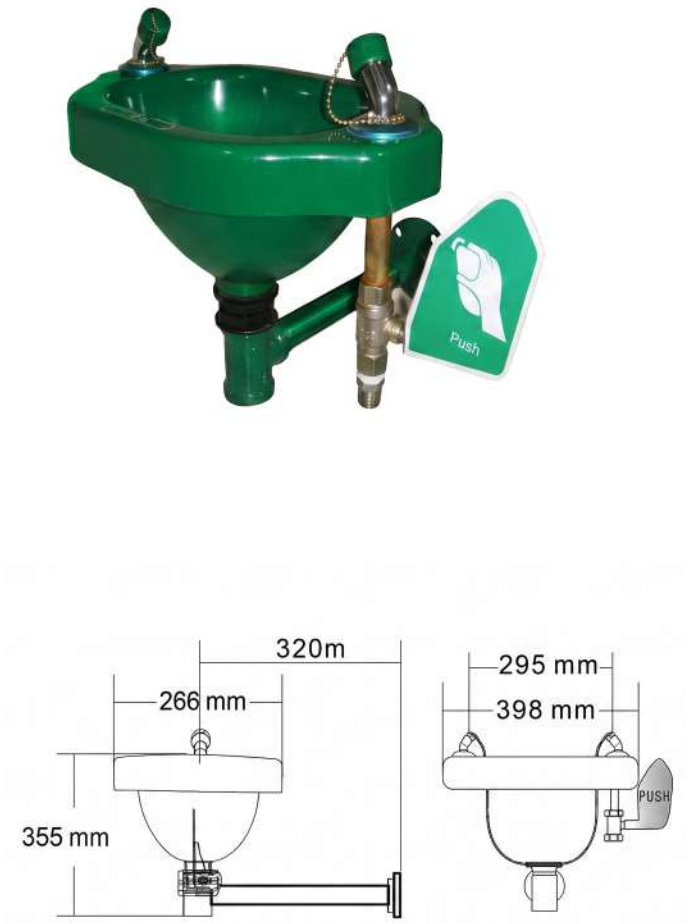

Standards:

This eyewash station is designed to comply with ANSI Z358.1 and EN15154-1 & EN15154-2 standards, ensuring reliable performance and safety for emergency eye irrigation in industrial and hazardous work environments.

Features:

- Wall-mounted emergency eyewash station for quick eye flushing during chemical exposure.
- Made from ABS plastic (safety green) for durability and corrosion resistance.
- ABS eyewash basin ensures lightweight design and easy maintenance.
- Push handle activation allows fast and simple emergency operation.
- Fitted with a 1/2" brass ball valve for reliable water control.
- Provides 12 L/min flow rate for effective eye washing.
- Operates within 0.2–0.8 MPa working pressure.
- Complies with ANSI Z358.1 and EN15154 standards.

Specifications

Water Type	Material	Valve	Water Inlet	Water Outlet	Operating Pressure	Activation	Flow Rate	Weight	Packaging	Model
Clean or Leached Water	ABS Plastic (Green Bowl)	1/2" Brass Ball Valve	1/2"	1-1/4" IPS/NPT	0.2 – 0.8 MPa	Push Handle	12 L/min	G.W. 4.5 kg N.W. 4 kg	52 × 29 × 26 cm (1 set/carton)	B100