

STAINLESS STEEL WALL MOUNTED BASIN


(SS-B100)



Standards:

This eyewash station is designed to comply with ANSI Z358.1 and EN15154-1 & EN15154-2 standards, ensuring reliable performance and safety for emergency eye irrigation in industrial and hazardous work environments.

- Features:**
- Wall-mounted emergency eyewash station for quick eye flushing during chemical exposure.
 - Made from SS304 stainless steel for durability and corrosion resistance.
 - Stainless steel basin ensures long service life and easy maintenance.
 - Flag handle activation allows fast and simple emergency operation.
 - Fitted with a 1/2" stainless steel ball valve for reliable water control.
 - Provides 11.4 L/min (3 GPM) flow rate for effective eye washing.
 - Operates within 0.2–0.8 MPa working pressure.
 - Complies with ANSI Z358.1 and EN15154 standards.

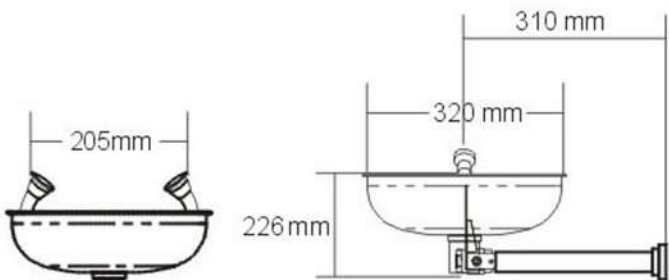

Specifications										
Water Type	Material	Valve	Water Inlet	Water Outlet	Operating Pressure	Activation	Flow Rate	Weight	Packaging	Model
Clean or Leached Water	Stainless Steel 304 (Pipe, Fittings & Bowl)	1/2" SS 304 Ball Valve	1/2" External Thread	1-1/4" Internal Thread	0.2 – 0.8 MPa	Flag Handle Operation	11.4 L/min (3 GPM)	G.W. 4.5 kg N.W. 4 kg	52 × 29 × 26 cm (1 set/carton)	SS-B100