


Major Fall Protection Series

Color zinc palted hardware
Lanyard with froged hook
Opening size of hook: 52mm

MH110

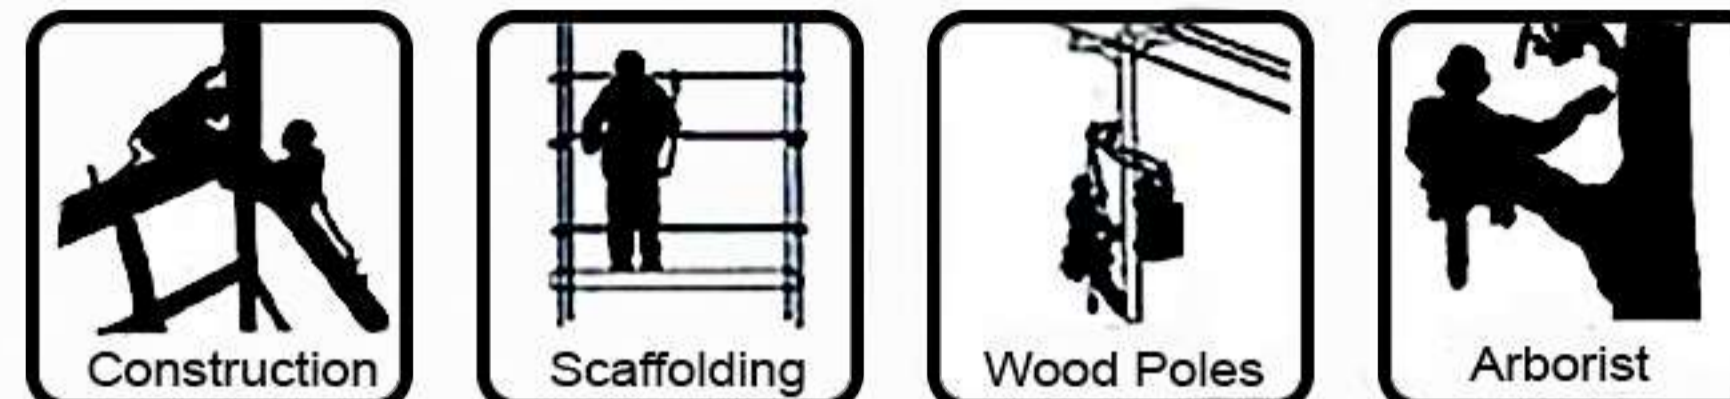

Applications: Industry

- Size: Universal
- Wight: 1.7kg
- Standard: EN361/EN358
- Material: Webbing Polyester,
Metal part steel

Buckle:

Chest	Shoulder	Waist	Legs
	N/A		

Description:

ATTACHMENTS:

One dorsal D-ring for fall arrest at the back and two lateral D-rings at the waist for work positioning. All D-rings are hot-pressed and tested for static strength up to 22 kN for 3 minutes.

ADJUSTMENTS:

Six adjustment points at shoulders, chest, waist, and thighs to adjust the length of straps. Includes one shoulder strap buckle, two chest strap buckles, and one waist strap buckle. Each buckle has a static strength of 15 kN for 3 minutes.

FABRIC & WEBBING:

Made from 100% PES (Polyester) with 45 mm wide webbing, providing static strength of 25 kN for 3 minutes.

CONVENIENCE:

Shoulders and thigh-straps are differentiated by a dual colour scheme for easy identification.

ERGONOMICS & COMFORT:

Equipped with an EVA lumbar pad for extended comfort during long working hours.

COMPLIANCE:

Conforms to EN 361:2002 and EN 358:2018 safety standards.

Attchments:

