


Major Fall Protection Series

Color zinc palted hardware
Lanyard with froged hook
Opening size of hook: 52mm

MH109

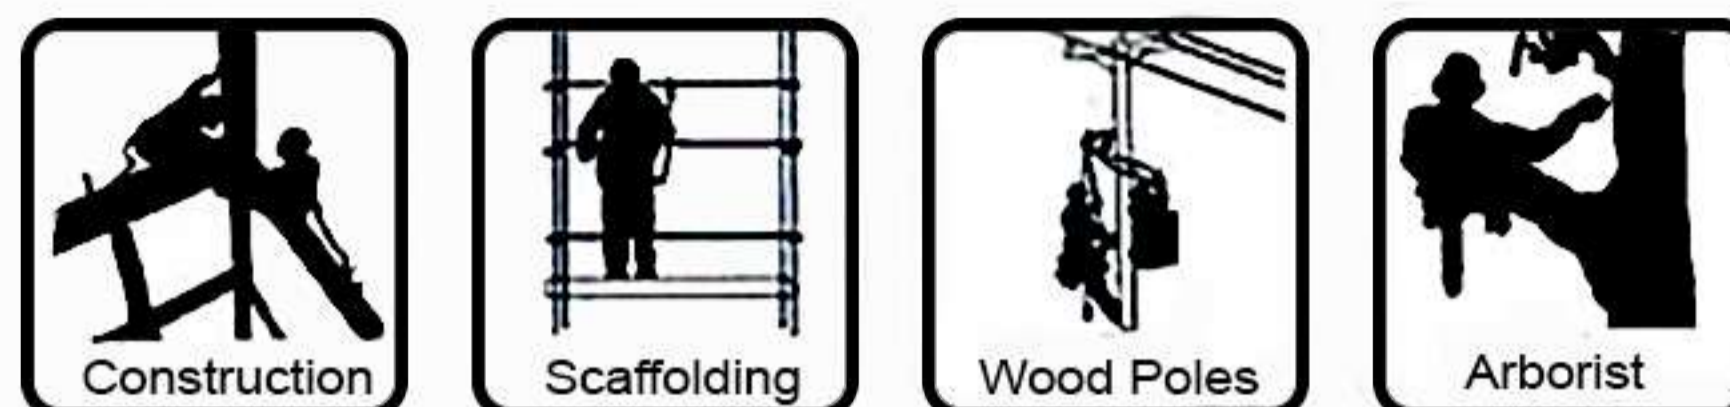

Applications: Industry

- Size: Universal
- Weight: 1.7kg
- Standard: EN361/EN358
- Material: Webbing Polyester,
Metal part steel

Buckle:

Chest	Shoulder	Waist	Legs
	N/A		

Description:

ATTACHMENTS:

Includes one Dorsal D-Ring and one Chest D-Ring for Fall Arrest, along with two Lateral D-Rings at the waist for Work Positioning. All D-rings are forged, heat-treated, and tested for a static tensile strength of 22 kN for 3 minutes.

ADJUSTMENTS:

Features 6 adjustment points located at the shoulders, chest, waist, and thighs to modify the strap length as needed. Equipped with quick-release buckles (male and female) — one set at the chest, two sets at the shoulders, one at the waist, and two at the thighs — each providing a static tensile strength of 15 kN for 3 minutes.

WEBBING:

Made from 100% PES (Polyester) with a 45 mm wide strap, offering a static tensile strength of 25 kN for 3 minutes.

CONVENIENCE:

Shoulder and thigh straps are colour-differentiated with a dual-tone design for quick and easy identification.

ERGONOMICS & COMFORT:

Fitted with an EVA lumbar pad to provide enhanced waist protection and long-lasting comfort during extended use.

COMPLIANCE:

Conforms to EN 361:2002 and EN 358:2018 international safety standards.

Attachments:

