


Major Fall Protection Series

Color zinc plated hardware
Lanyard with froged hook
Opening size of hook: 52mm

MH111

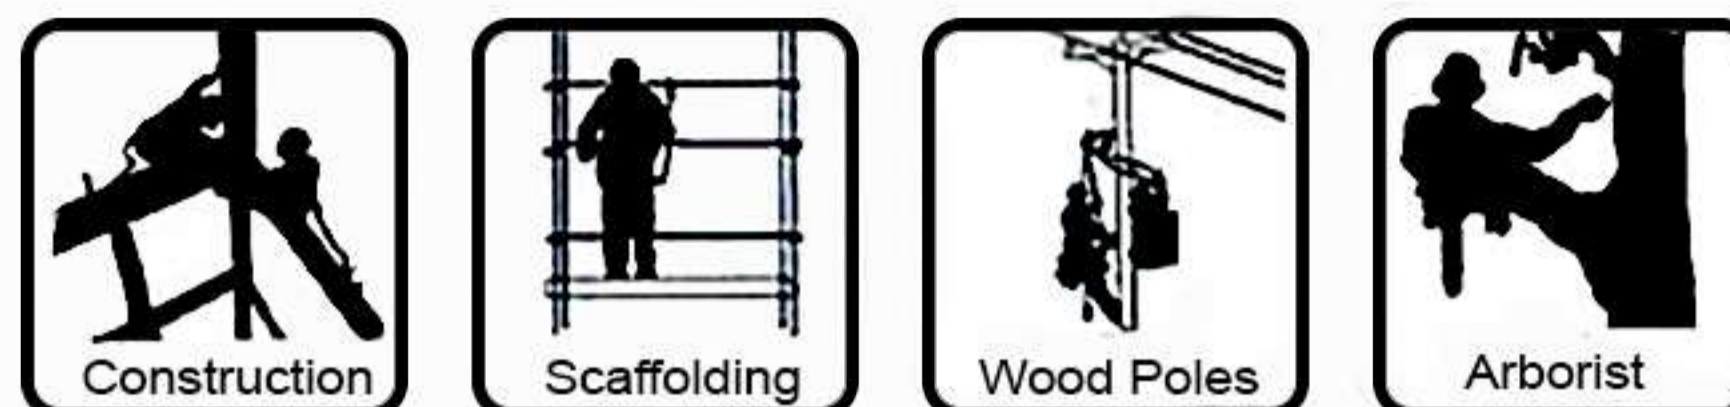

Applications: Industry

- Size: Universal
- Weight: 2.1kg
- Standard: EN361/EN358
- Material: Webbing Polyester,
Metal part steel

Buckle:

Chest	Shoulder	Waist	Legs
	N/A		

Description:

ATTACHMENTS:

1 Chest D-Ring and 1 Dorsal D-Ring for Fall Arrest, 1 Front Waist D-Ring for Climbing, and 2 Lateral D-Rings at the Waist for Work Positioning. All D-rings are forged, heat-treated, and tested for a static tensile strength of 22 kN for 3 minutes.

ADJUSTMENTS:

6 Adjustment Points located at the shoulders, waist, and thighs to adjust the strap length as required.

Includes two sets of quick-release buckles (male and female) at the shoulders, one set at the waist, and two sets at the thighs — each with a static tensile strength of 15 kN for 3 minutes.

WEBBING:

Made of 100% PES (Polyester) with a 45 mm width, providing a static tensile strength of 25 kN for 3 minutes.

CONVENIENCE:

Shoulder and thigh straps are differentiated by a dual colour scheme for easy identification and adjustment.

ERGONOMICS & COMFORT:

Equipped with EVA padded back, lumbar, and leg pads for enhanced comfort during prolonged use.

COMPLIANCE:

Conforms to EN 361:2002 and EN 358:2018 international safety standards.

Attachments:

